




SWITCH TOBRIGHTER FUTURE

Product data sheet: LIM-12D

Features

- Independent design
- Dimmable constant current driver
- Analogue flicker-free
- DALI-2 certified
- Configurable constant current output via dip-switch
- Switch-Dim function
- Dimming range 0.1...100%
- Push wire connections
- Protections: opencircuit, shortcircuit, overload, Overtemperature
- DC input compatible (176-250VDC)
- SELV equivalent
- Suitable for use in emergency lighting systems
- Suitable for protection class II luminaires
- Protection class II

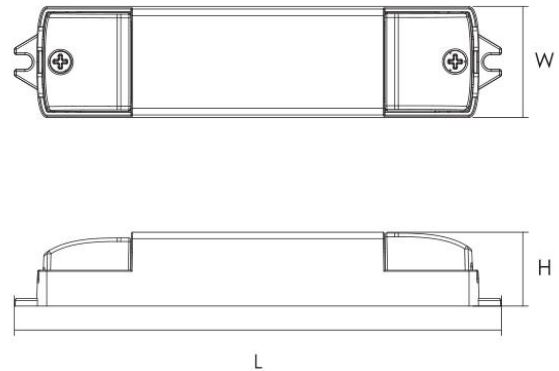

Applications

- Office
- Shop
- Hospitality
- Public areas

Approbations & Certifications

TUV,CE,CB,DALI2

Housing properties

- Housing material: plastic, white.
- Type of protection IP20

Electrical Specifications

Type		Unit	LIM-12D								
INPUT	Nominal voltage	V	220 – 240								
	Nominal frequency	Hz	0 / 50 / 60								
	AC voltage range	V	198 – 264								
	DC voltage range	V	176-250								
	Nominal current	A	0.08								
	THD (Full load)	%	≤ 15								
	Power factor(Full load)		0.95								
	Efficiency(Full load)	%	79								
	No load	W	≤0.5								
	Protection class		II								
	Inrush current(Cold start)	A pk	10(th = 100 μs)								
	Max.units per circuit breaker		B10: 70 B13: 91 B16: 112 B20: 140 C10: 125 C13: 162 C16: 200 C20: 250								
	OUTPUT	Nominal voltage range	V	2 -42	2 -42	2 -42	2 -40	2 -34	2 - 24	2 -20	2 -17
Maximum voltage(Open Circuit)		Vdc	≤ 54								
Nominal current		mA	150	200	250	300	350	500	600	700	
Current accuracy		%	+/- 10		+/- 8	+/- 5					
Current ripple 100Hz		%	≤ 20								
Pst LM			≤ 1								
SVM			≤ 0.4								
Nominal power range		W	0.3 – 6.3	0.4 –8.4	0.5– 10.5	0.6 - 12	0.7 - 12	1 - 12	1.2 - 12	1.4 - 12	
Maximum power		W	12								
Galvanic isolation			SELV								
ENVIRONMENT		Ambient temperature range ta	°C	-20 ...+45							
		Maximum case temperature tc	°C	90							
	Max. Case temp. In fault condition	°C	110								
	Storage temperature range	°C	-20 ...+70								
	Relative humidity	%	5 ... 85(Not condensing)								
	Surge transient protection	kV	1 2 (L/N LN/PE acc to. EN 61547 Clause 5.7)								
	Environmental rating		Indoor								
	IP rating		IP 20								
	Mains switching cycles		> 100,000								
	Expected lifetime	h	50,000 (0.2% / 1'000 h failure rate)								

*All parameters NOT specially mentioned are measured at 230VAC input ,rated current and 25°C of ambient temperature

Protections

Over temperature

Yes

Overload

Yes

No load

Yes

Short-circuit

Yes



Input overvoltage

Maximum allowed input voltage 264VAC


Output overvoltage

Yes, Limitation of Output voltage <54V


OUTPUT LOAD vs TEMPERATURE

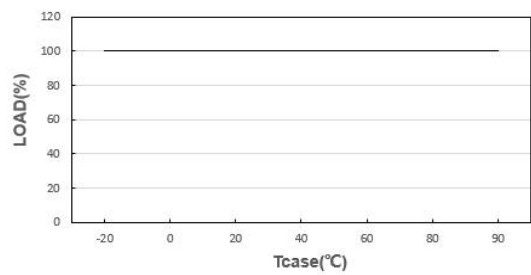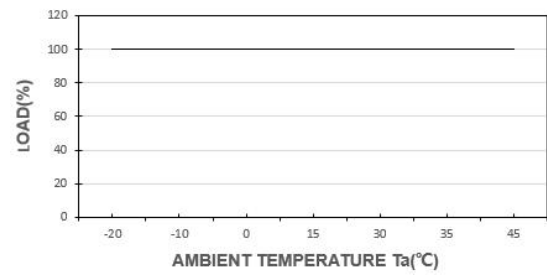


STATIC CHARACTERISTIC

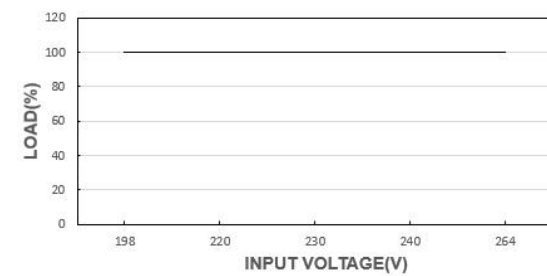


POWER FACTOR (PF) CHARACTERISTIC

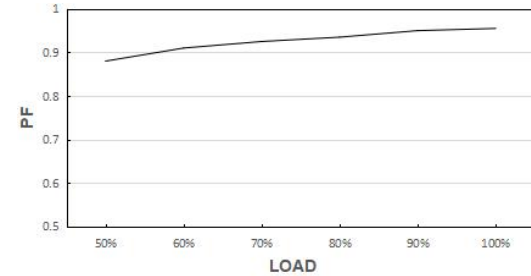


TOTAL HARMONIC DISTORTION (THD)

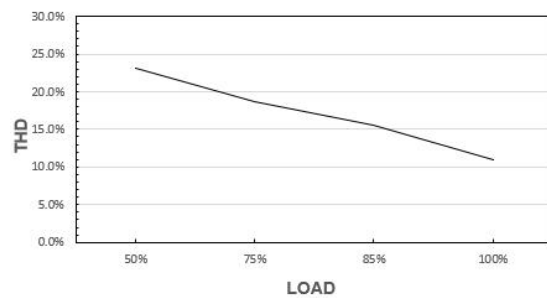

EFFICIENCY vs LOAD

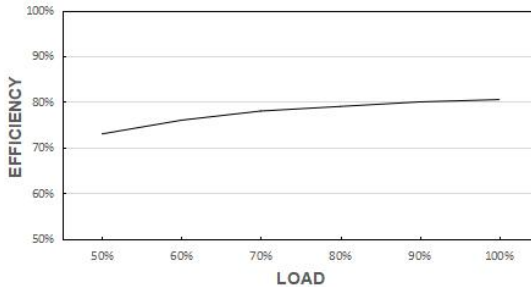


LIFE TIME

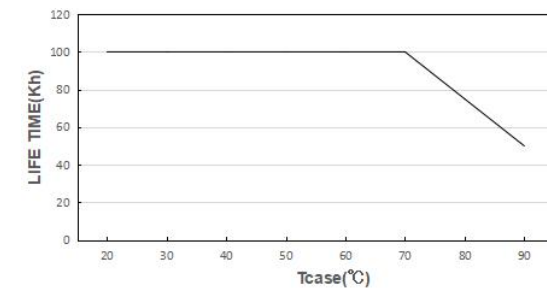

*The graph is for reference only, and the detailed values refer to the parameter table

Wiring Diagram

Terminal:	Screws
Max. cable length–DALI system:	300m
Dimensions(LxWxH):	132 x 30 x 20 mm
Mounting hole spacing, length :	126.3 mm
Weight:	60 ± 5 g

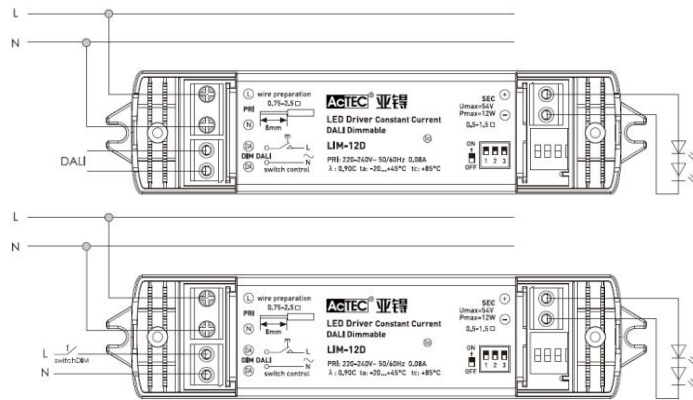

PRI

Cable cross-section:	0.75-2.5
Stripping:	8mm

SEC

Cable cross-section:	0.5-1.5
Stripping:	8mm

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

Remarks

-**Touch current:** lower than 0.7 mA, according to EN 60598-1 annex. G and EN 61347-1 annex A.

Standards

EN 61347-1
 EN 61347-2-13
 EN 62384
 EN 55015
 EN 61000-3-2
 EN 61000-3-3
 EN 61547
 EN 60598-1
 EN 62386-101
 EN62386-102
 EN62386-207
 IEE1789
 (EU) 2019/2020

Manufacturer's address:

No.4,Tongfu Road,Tong'an Industrial Center,Tong'an District,Xiamen,Fujian,China

www.actec.com